



urban™

RESIDENTIAL
STACKING/SLIDING DOOR


CAPRAL
ALUMINIUM



URBAN STACKING/SLIDING DOOR

The Urban Stacking/Sliding Door has been designed to take advantage of the great outdoors, to deliver that perfect alfresco environment. Configurations of two, three and four-panel standard designs plus the added options of three or six-panel multi-stacking and corner entry options, allow for a high degree of design flexibility.

The door's excellent structural and weather performance is designed to suit Australia's wide range of climate conditions. Complemented with high quality surface mounted hardware, integrated insect or barrier screening options and double glazing capabilities ensure the Urban Stacking/Sliding Door can be tailored to your exacting requirements.

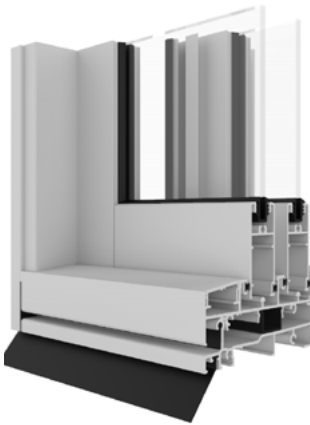

FEATURES AND BENEFITS

- 101.6mm Framing System
- Single and double glazed options
- Standard configurations (XO/OXO/OXXO)
- Multistack configurations (XXO/OXXXXO)
- Inside and outside corner configurations (OXXcXXO)
- Highlight and sidelight options available on selected configurations
- Standard and low profile sill options
- Self draining sill design
- Integrated insect and security screening options
- Custom design hardware options
- Standard and mortice lock options
- Cavity slider & Corner Sliding options
- Commercial Frame Options
- Linear Grate Options
- Bushfire and Acoustic ratings

Sliding / Stacking

MAXIMUM PERFORMANCE	
SLS	2500Pa / 3000Pa
ULS	6000Pa / 5500Pa
Water	450Pa / 300Pa

FRAME DIMENSIONS

Option 1 Sill	101.6 x 50mm STD
Option 2 Sill	101.6 x 62mm HP
Option 3 Sill	101.6 x 19mm LP

MAXIMUM RECOMMENDED SIZE

Height	2700mm
Width	1200mm STD 1500mm HD
Weight	160kg

GLAZING CAPACITY

Single Glazed	4mm-10mm
Double Glazed	16mm - 18mm

WINDOW ENERGY RATINGS

Window ID	Glazing	Uw	SHGC	Tw	Air Inf
CAP-126-01	5Gy	6.1	0.52	0.39	0.23
CAP-126-02	6Clr	6.0	0.69	0.73	0.23
CAP-126-03	6Gy	6.0	0.49	0.35	0.23
CAP-126-04	6ET	4.2	0.59	0.67	0.23
CAP-126-05	6.38Sx	6.0	0.67	0.73	0.23
CAP-126-06	6.38SxGy	6.0	0.52	0.35	0.23
CAP-127-01	4Clr/10/4Clr	3.7	0.63	0.66	0.23
CAP-127-02	4Gy/10/4Clr	3.7	0.47	0.41	0.23
CAP-127-03	4Clr/10Ar/4Clr	3.6	0.63	0.66	0.23
CAP-127-25	AGG PLUS Clr 4/10/4	2.7	0.51	0.66	0.23
CAP-127-26	AGG PLUS Clr 5/8/5	2.8	0.5	0.66	0.23
CAP-127-27	AGG PLUS Clr 6/8/4	2.8	0.5	0.66	0.23
CAP-127-28	AGG PLUS Gy 4/10/4	2.7	0.37	0.41	0.23
CAP-127-29	AGG PLUS Gy 6/8/4	2.8	0.31	0.33	0.23
CAP-127-32	AGG MAX Clr 6/8/4	2.8	0.24	0.54	0.23



Capral's Urban range is extruded in Australia using LocAl® Green primary aluminium.

- 50% lower-carbon emissions than global averages for primary aluminium
- 8kg CO₂e/kg Al
- ASI Certified Smelter



1800 ALUMINIUM (258 646)
capral.com.au
Capral Limited ABN 78 004 213 692
October 2022

View full list of Residential WERS ratings at capral.com.au